

ZF / EXTERNAL SEALING CONNECTION TOOL

Wide tolerance sealing connection tool for formed tubes.

CONNECTS TO:

Beaded Barbed Formed



SPECIFICATIONS

Pressure Rating	Operating Temperatures	Materials of Construction
Vacuum to 300 psi (21 bar)	0°F to +200°F (-17°C to +93°C)	Anodized Aluminum
Termination Port		Seal Material*
1/8 NPT to 3/8 NPT		Main seal: Neoprene Internal seal: Buna-N

* Additional seal material types available, consult factory.

ACTUATION METHOD

Manual Sleeve: Easy, ergonomic sleeve action eliminates repetitive twisting and turning - push to connect, pull to release

INTELLIGENT CONNECTION TECHNOLOGY


Consult Factory

ACCESSORIES

Visit fastestinc.com

- 1 Wide tolerance seal design provides fit to a range of tube diameters
- 2 Color coded handles to assist operator in proper tool identification
- 3 Self aligning connector requires no operator adjustment
- 4 Quick and easy seal replacement to minimize down time, maintenance, and tool inventory

ZF / EXTERNAL SEALING CONNECTION TOOL

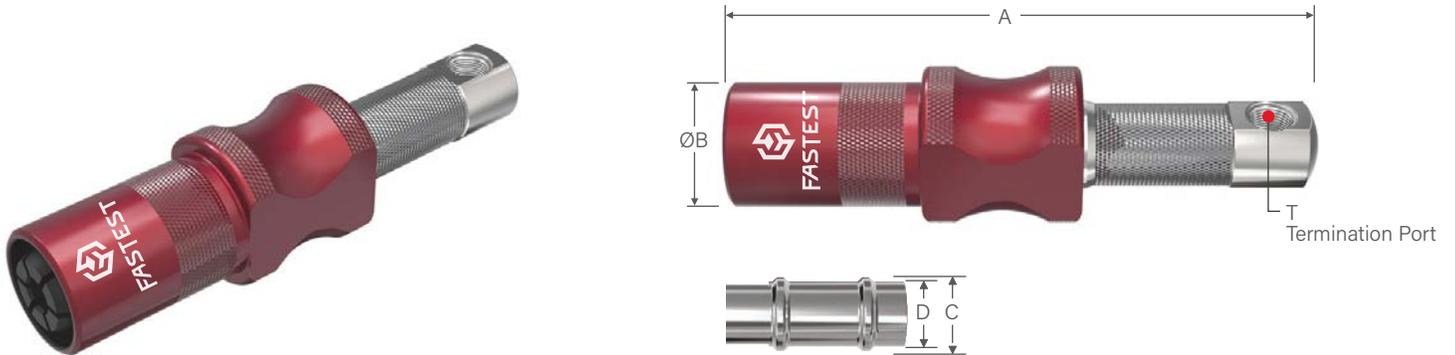

Ordering Information						Dimensions		
Connects To:		Part Number	Seal Kit	Rebuild Kit	Pressure Rating	A	B	T
Bead Dia. Range (C)	Tube Dia. Range (D)							
0.310 to 0.400 (7.9 to 10.2)	0.25 to 0.34 (6.5 to 8.7)	ZF1	SZF1	RZF1	300 (21)	4.60 (116.8)	0.98 (24.8)	1/8 NPT
0.400 to 0.490 (10.2 to 12.4)	0.34 to 0.44 (8.7 to 11.0)	ZF2	SZF2	RZF2		4.90 (124.5)	1.14 (28.9)	1/8 NPT
0.490 to 0.580 (12.4 to 14.7)	0.44 to 0.52 (11.0 to 13.2)	ZF3	SZF3	RZF3		4.96 (126.0)	1.23 (31.2)	1/4 NPT
0.580 to 0.670 (14.7 to 17.0)	0.52 to 0.61 (13.2 to 15.5)	ZF4	SZF4	RZF4		5.18 (131.6)	1.38 (35.0)	1/4 NPT
0.670 to 0.760 (17.0 to 19.3)	0.61 to 0.70 (15.5 to 17.8)	ZF5	SZF5	RZF5	250 (17)	5.25 (133.0)	1.55 (39.4)	3/8 NPT

Dimensions: inch (mm)
Pressure Rating: psi (bar)



DON'T SEE A SOLUTION FOR YOUR APPLICATION? Submit a custom application form and drawing to fastsales@fastestinc.com or to your local distributor.